TYPE 1
ALUMINIUM FRAME

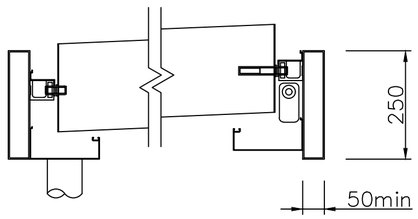

TYPE 2
TIMBER FRAME

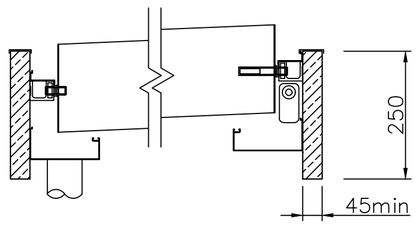

TYPE 3
REVERSE STEEL PFC

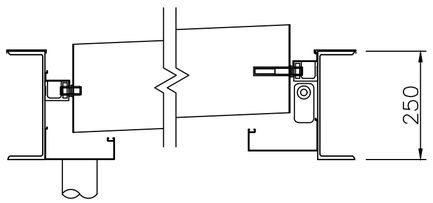

TYPE 4
CLADDED UNIVERSAL BEAM

250mm EYE/UNIVERSAL BEAM WITH TIMBER PACKING AND FLASHING OVER INSIDE

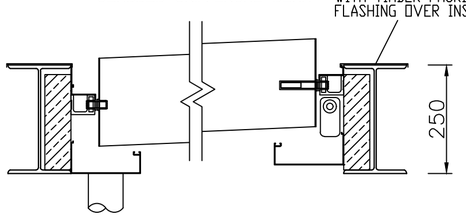

TYPE 5
MASONRY REVEAL/FRAME

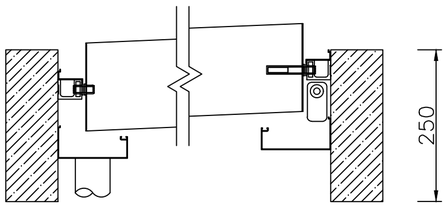

LR200 LOUVRE BLADE DETAIL

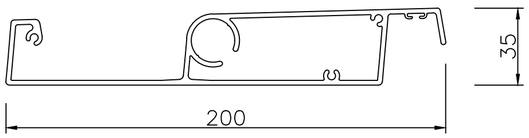

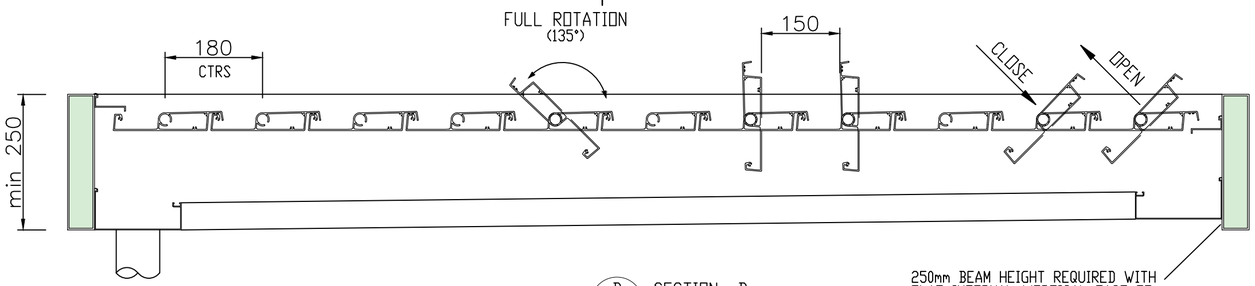

B
-
SECTION -B

250mm BEAM HEIGHT REQUIRED WITH FLAT INTERNAL VERTICAL FACE OF BEAM WITHIN +-5MM TOLERANCE

A
1

DOWNPIPE SPIGOT LOCATION TO BE DETERMINED ONSITE. (SPIGOT INSTALLED BY OBA AND DOWNPIPES BY OTHERS)

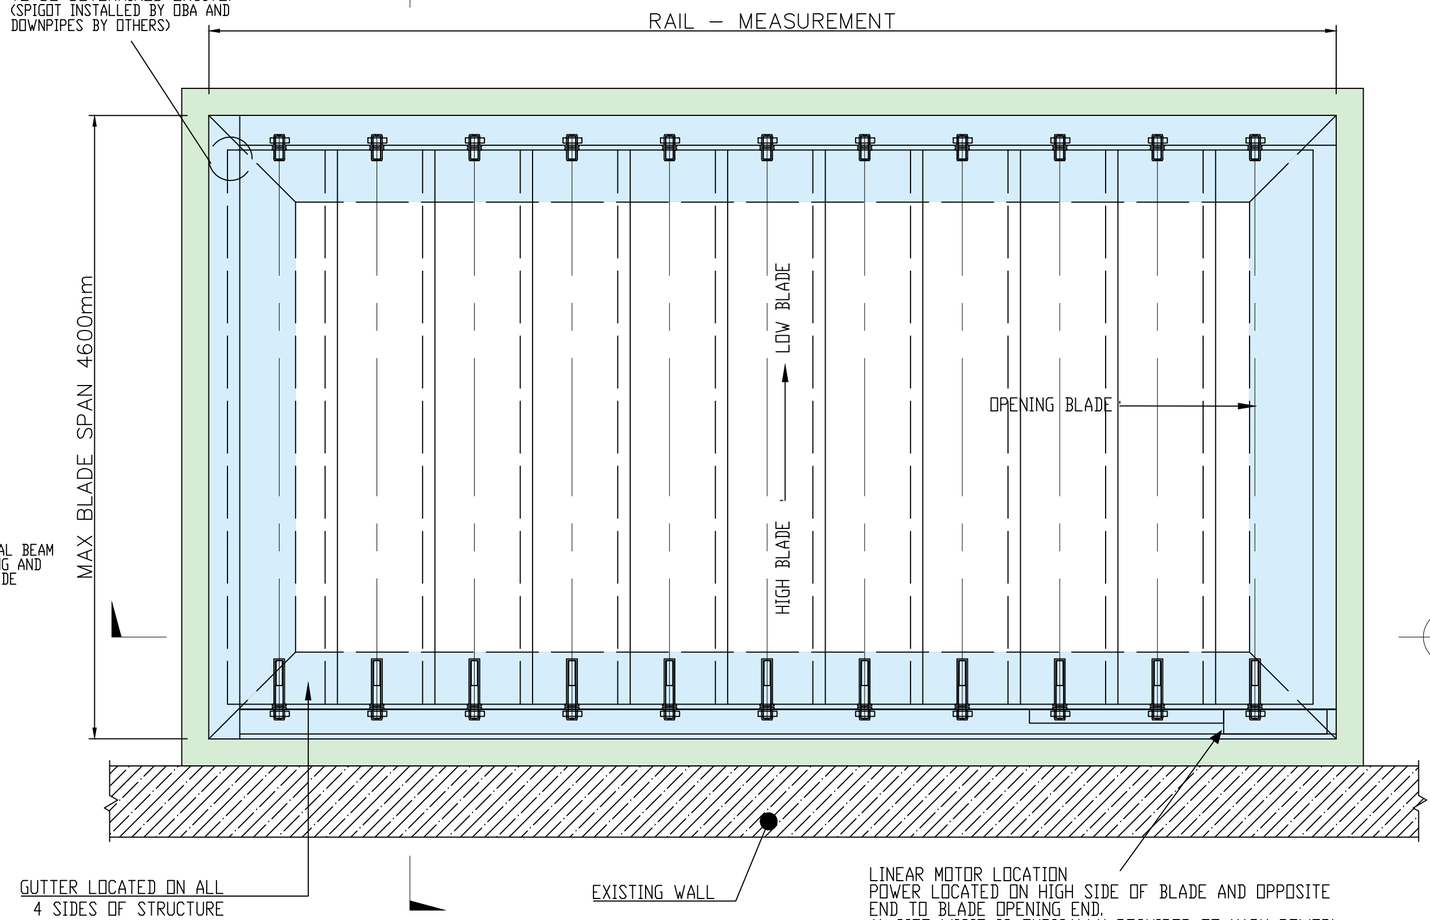

GUTTER LOCATED ON ALL 4 SIDES OF STRUCTURE

EXISTING WALL

LINEAR MOTOR LOCATION
POWER LOCATED ON HIGH SIDE OF BLADE AND OPPOSITE END TO BLADE OPENING END.
(A SITE VISIT IS TYPICALLY REQUIRED TO MARK POWER)

B
-

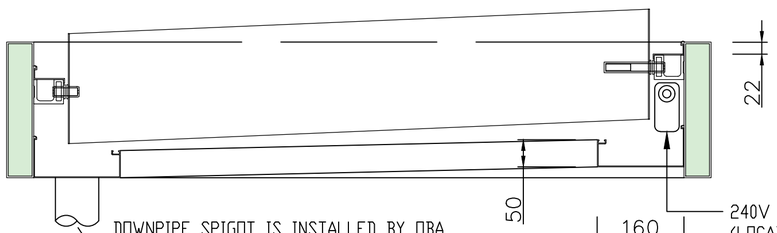

DOWNPIPE SPIGOT IS INSTALLED BY OBA
LOW SIDE OF BLADE IS RECOMMENDED.
(DOWNPIPE IS BY OTHERS)
OBA WILL NOT RECOMMEND HORIZONTAL SPIGOT DESIGN AND ONLY VERTICAL DOWNPIPE SPIGOTS.

240V ACTUATOR
(LOCATED AT HIGH SIDE OF LOUVRE BLADE)

A
-
VIEW - A

LEGEND:

THIS INDICATES SUPPORT FRAME BY CLIENT OR BY OBA.
(OBA FRAME IS OPTIONAL)

THIS INDICATES GUTTER

MED TWIST LR200 SYSTEM

BLADE SPECIFICATIONS

BLADE DESIGN	LINEAR
BLADE DIMENSIONS	200mm x 35mm x 2.1mm
BLADE MATERIAL	EXTRUDED ALUMINIUM 6061–T6
BLADE FINISH	POWDER COATED
BLADE CENTERS	180mm
BLADE OPENING	150mm

GUTTER SPECIFICATIONS

GUTTER DESIGN	SQUARE EDGE
GUTTER DIMENSHIONS	160mm x 50mm
GUTTER MATERIAL	EXTRUDED ALUMINIUM 6061–T6
GUTTER FINISH	POWDER COATED

RAIL SPECIFICATIONS

RAIL TRACK	55mm x 45mm x 6mm
RAIL TRACK MATERIAL	EXTRUDED ALUMINIUM 6063–T5
RAIL TRACK FINISH	POWDER COATED

CONTROL BAR SPECIFICATIONS

CONTROL BAR	50mm x 10mm x 3mm
CONTROL BAR MATERIAL	EXTRUDED ALUMINIUM 6063–T5
CONTROL BAR FINISH	POWDER COATED

PARTS AND CONNECTOR SPECIFICATIONS

PIN SET	14.3mm DIA 316 MARINE GRADE STAINLESS STEEL
SPRING SET	316 MARINE GRADE STAINLESS STEEL
CONNECTOR HOUSING	100% UV STABLE POM–H
WEATHER STRIP	PVC STORM INSERTION STRIP

MOTOR & CONTROL SPECIFICATIONS

MOTOR TYPE	240V ACTUATOR
CONTROLS	HARD WIRED OR REMOTE OPERATION
SENSORS	RAIN, WIND & SUN SENSORS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE
DRAWN			
CHK'D			
APPV'D			
MFG			
Q.A			

MATERIAL:

WEIGHT:

TITLE:

OBA AUSTRALIA
SALES@OBAAU.COM.AU
WWW.OBAAU.COM.AU

DWG NO:
MED TWIST LR200 SYSTEM
BLADES PERPENDICULAR TO BUILDING

A2

SCALE:1:2

SHEET 1 OF 1