



CUBEBOX FOLDING ARM AWNING


For the ultimate in style, design and protection, the compact *CubeBox Full Cassette Folding Arm Awning* is designed to be discreet and blend into most architectural styles.

Exceptional in areas that are exposed to rain or wind, *CubeBox* is equipped with fully enclosed cassette that is engineered to protect the operating mechanism and fabric against dirt, rain and humidity - keeping the awning in top condition.

With its low depth profile, heavy duty tilting point, slim arm design, the fully motorised *CubeBox* is the perfect awning with modern design and performance.

SYSTEM SPECIFICATIONS


System	CubeBox full-cassette folding arm awning
Minimum width	2000mm
Maximum width	7000mm
Maximum projection	4000mm
Installation angle	5-35°
Standard operation	Motor Gear unit and hand crank possible
Fabric colours	Over 200 fabric colours
Standard frame colours	Over 120 Dulux and Interpon powdercoat colours
Premium frame colours	Over 50 Dulux Duratec and Electro commercial colours

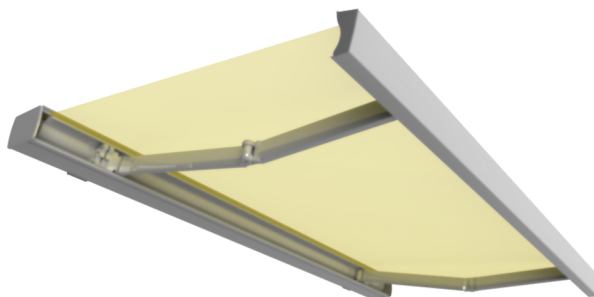


TECHNICAL INFORMATION

Brackets	Face, top, rafter/soffit fix and fascia brackets
	Top fix brackets: 150 x 145mm
	Fascia brackets: 0°, 10°, 20°
Mechanism	Roof mount brackets: 550 x 600mm
	Cubebox Cassette offers the awning fabric total protection from the elements
	Architectural grade extruded aluminium
	Articulated folding arms
Testing	High quality extruded and drop-forged arms offer safety and reliability even under extreme loads
	Unique power band system ensures proper tensioning of the fabric and consists of 2 tear-resistant steel cables
	Tested for 60,000 arm operations
	Tested in winds equivalent to 35-45km/h
Sun and wind control systems	Optional automation via wind control sensor
	Optional automation via Soliris sun and wind sensor
	Automated reaction in high winds
	Adjustable wind sensitivity levels


TOP VIEW

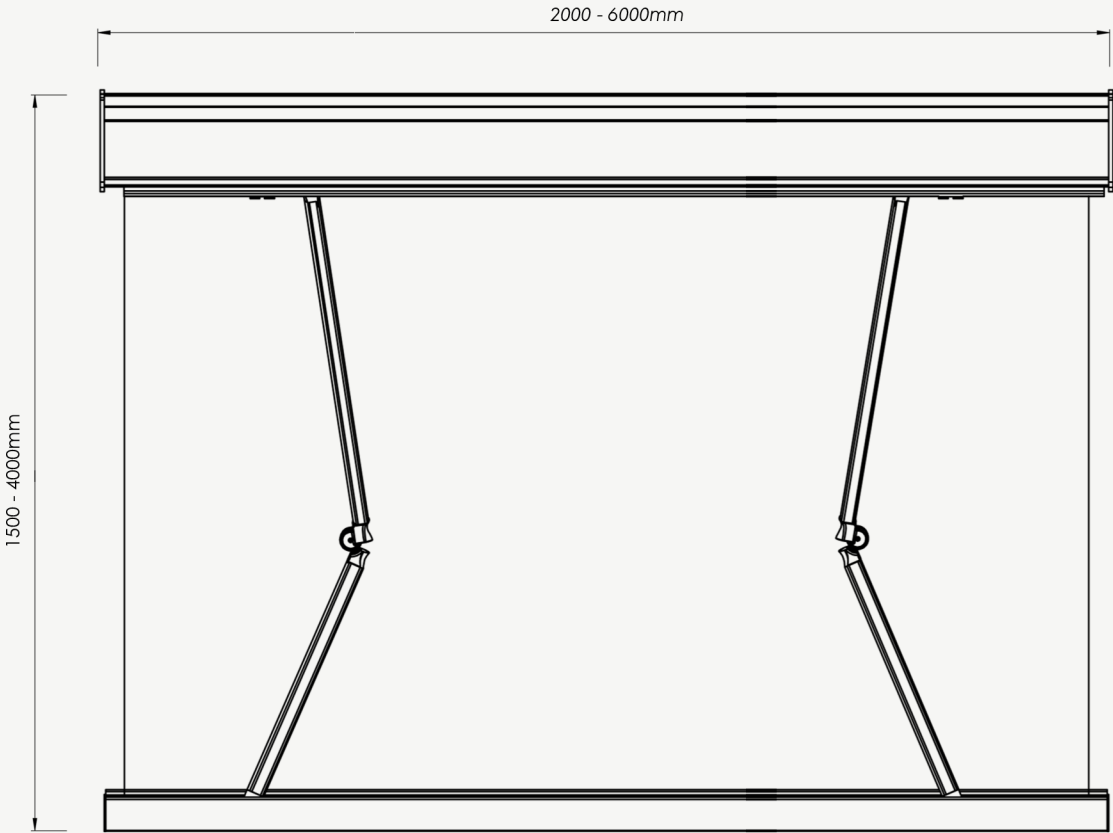


SIDE VIEW

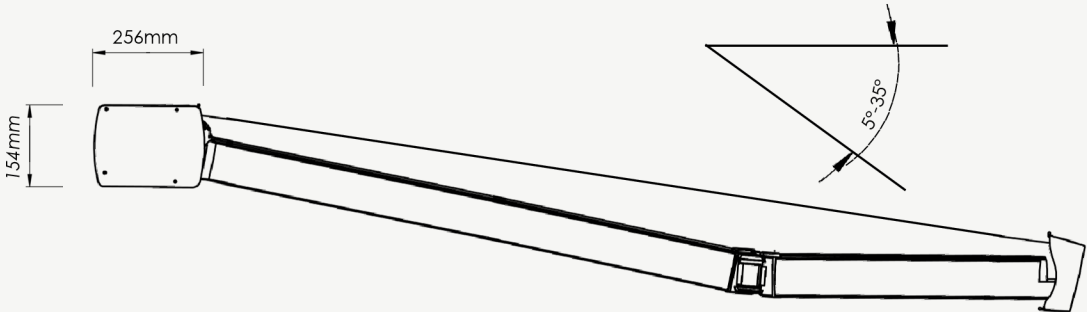


TOP VIEW

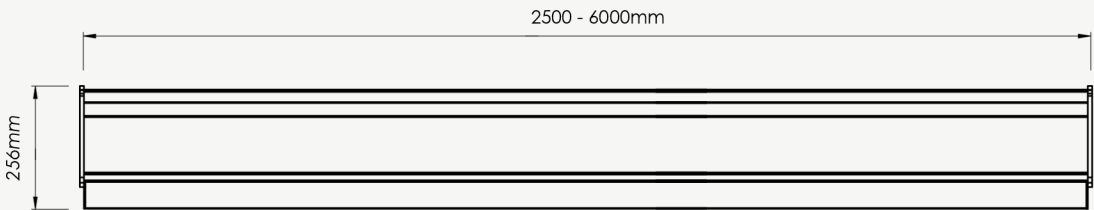


FRONT VIEW

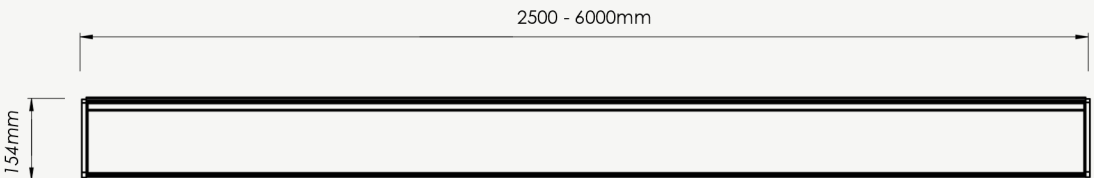


SIDE VIEW




WALL MOUNT (FACE) INSTALLATION 5-35°

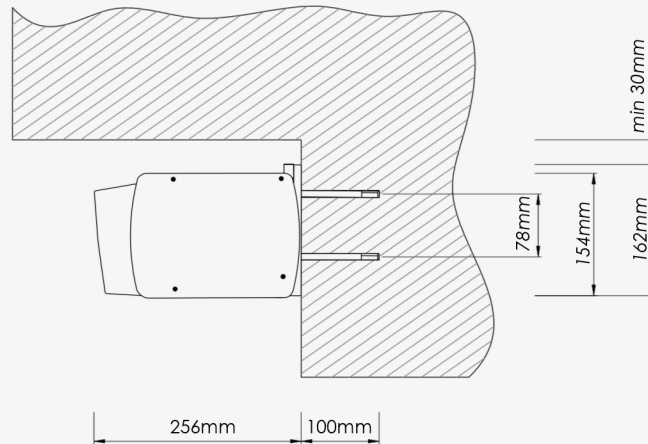


TOP MOUNT INSTALLATION 5-35°

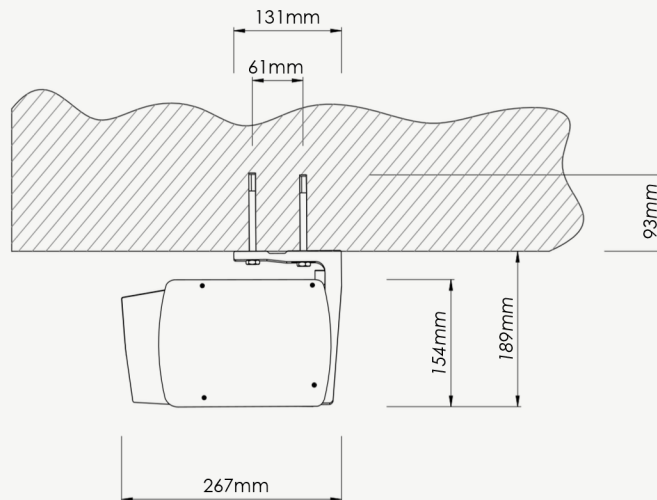


FULLY RECESSED INSTALLATION

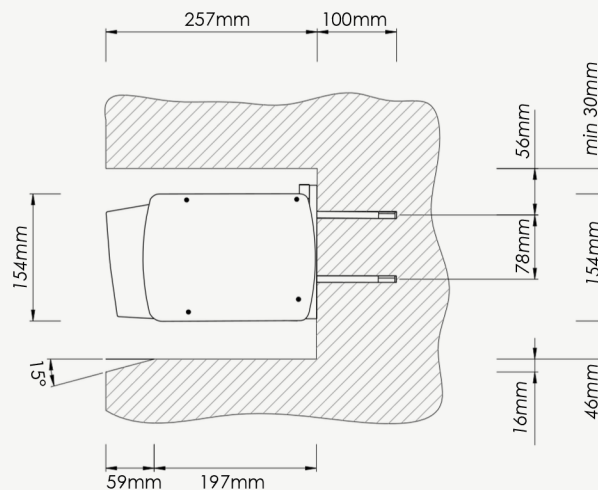


ROOF MOUNT
INSTALLATION

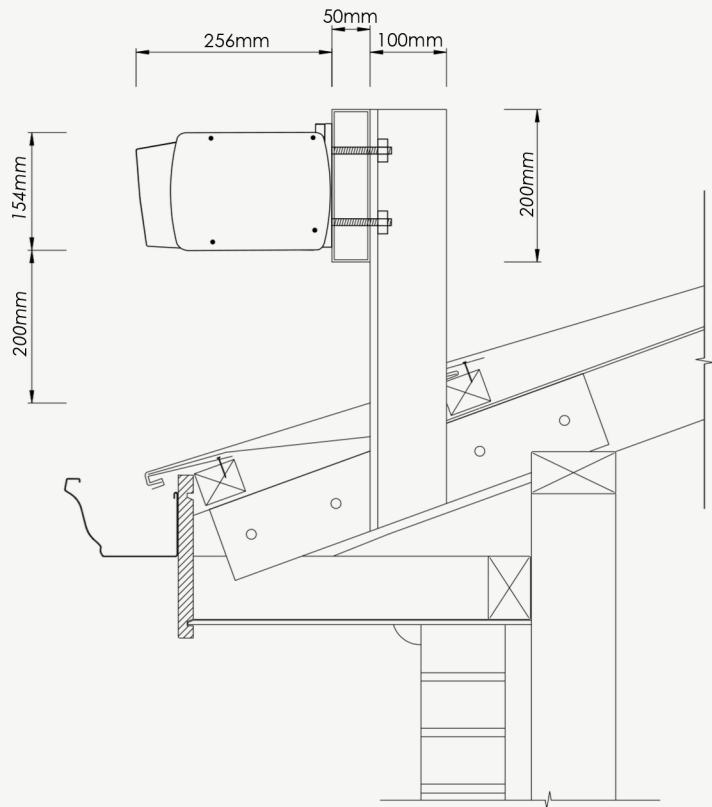


FASCIA MOUNT
INSTALLATION

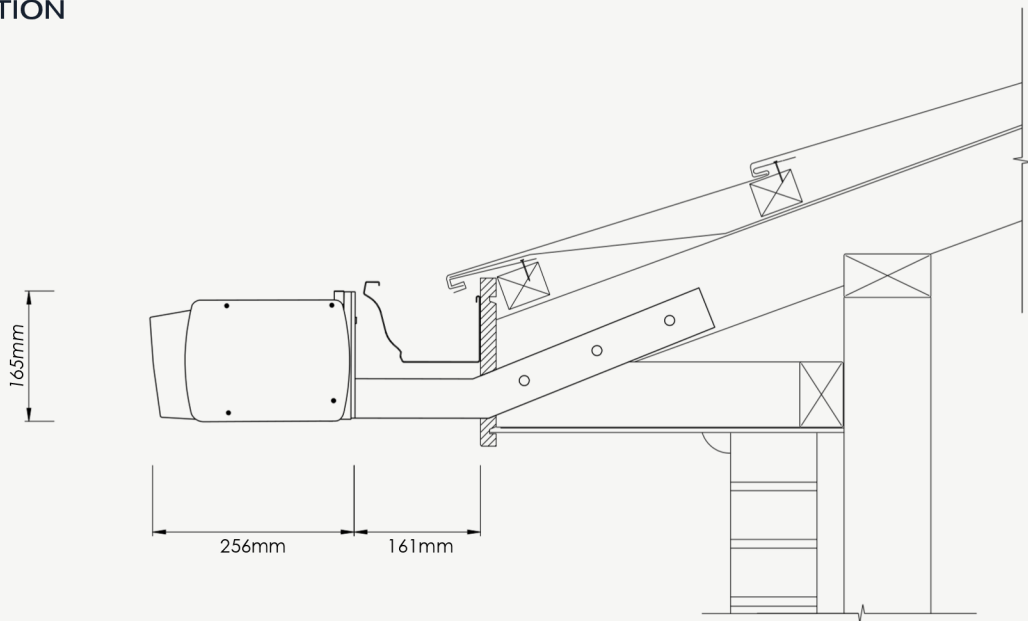


SOFFIT / UNDER EAVES EXPOSED RAFTERS INSTALLATION

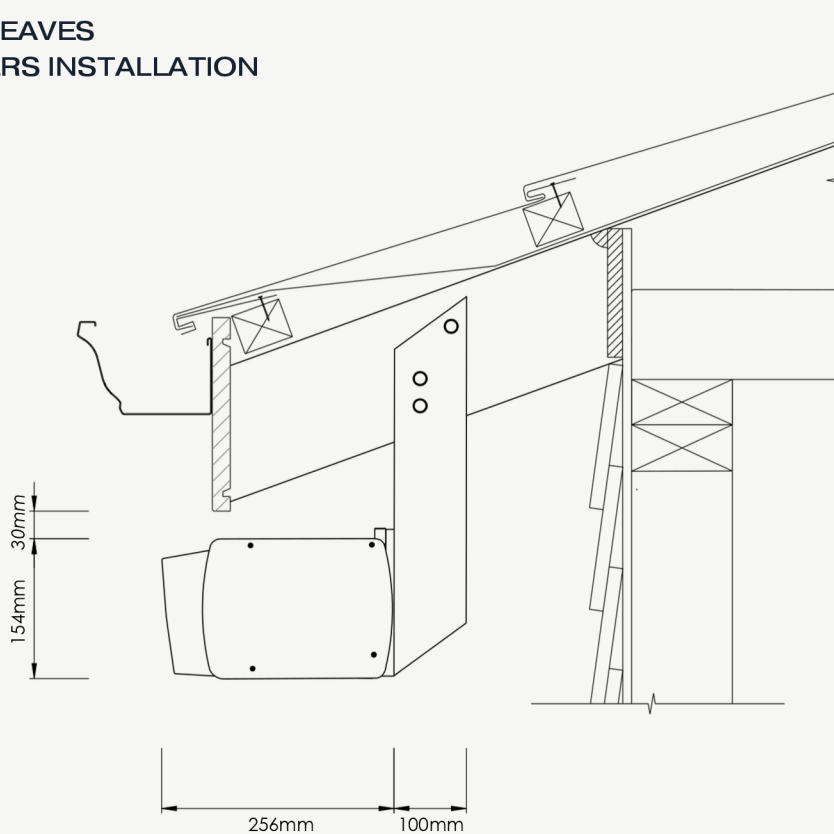


SOFFIT / UNDER EAVES CLOSED OFF EVE INSTALLATION

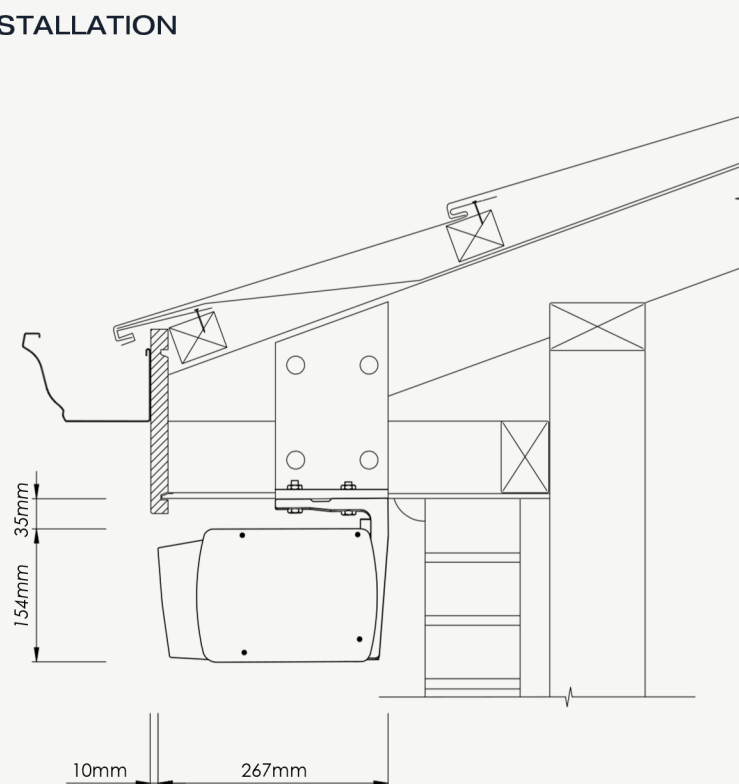


WALL FLASHING PROFILE

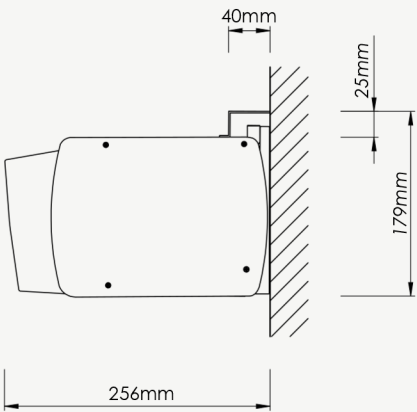


AWNING HEIGHT FOR
STANDARD 15° SLOPE

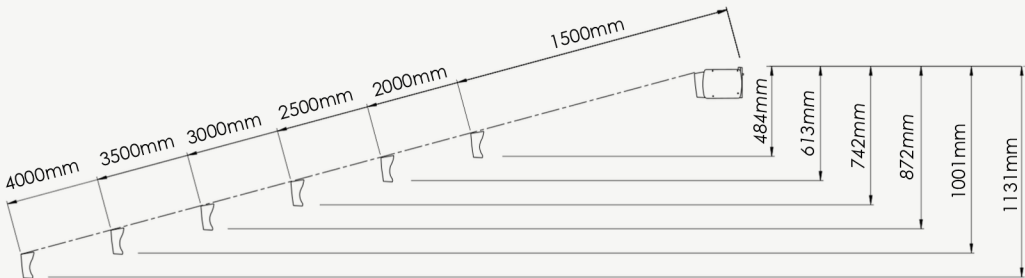


WALL MOUNT BRACKET

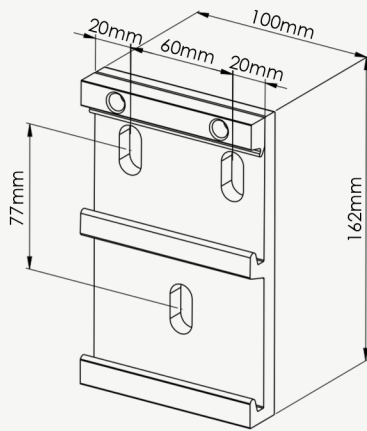


TOP MOUNT BRACKET

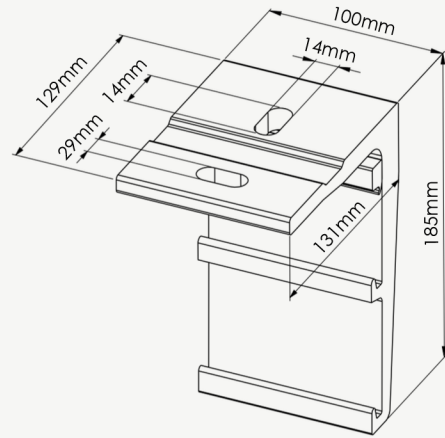

SOFFIT/UNDER EAVES BRACKET

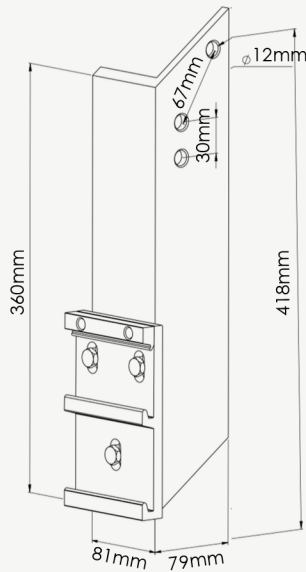

RAFTER FIX BRACKET

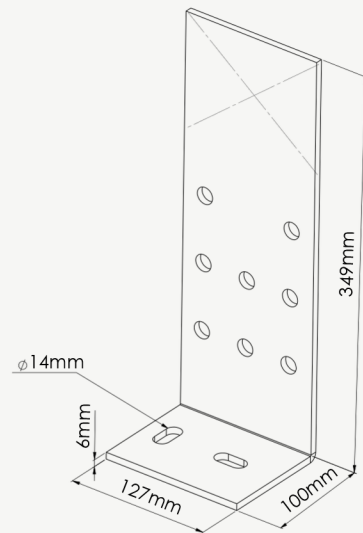

FACIA MOUNT BRACKET 22°

