

# MED TWIST

## LOUVRE ROOF SYSTEMS

An advanced all-aluminium **bioclimatic pergola** designed to seamlessly integrate indoor and outdoor living. With its elegant, minimalist design, this motorised louvre roof system enhances any residential or commercial space, creating a refined year-round outdoor environment.

The extruded aluminium **blades rotate up to 135°**, offering precise control over shade, ventilation, and UV protection. With a single touch of the remote, users can effortlessly adjust the louvres to suit changing weather or comfort needs.

Built for versatility, the *Med Twist Louvre Roof* can be customised with various finishes, integrated lighting, heating, and automation options — delivering a premium outdoor experience tailored to your lifestyle or project requirements.



# MED TWIST

## OPTIONS AND FEATURES

Ready for any weather



### CONSTRUCTION

Powder Coated Extruded Aluminium



### CUSTOM MADE

Each Med Twist Louvre Roof System is custom made specifically to suite your project. Choose from over 100 premium Dulux and Interpon powder-coating colours to further customise your outdoor pergola.



### COMFORT, AESTHETICS & EASE OF USE

Offers superb sun and rain protection with seamless integration.



### SYDNEY MANUFACTURED

Locally made to ensure quality every step of the way



### OPERATION OPTIONS

Motorised.



### AUTOMATION OPTIONS

Available automation options include hardware to a wall switch panel or a remote control; wide range of Automation sensors such as wind or wind/sun sensors, motion sensors and rain sensors that easily integrate with existing or new Smart Home Automation Systems for convenient voice control commands.



### SYSTEM SIZE

Width: min 2m - max 5m

Depth: min 2m - max 6m for a single motor;  
6m - 8m for a dual motor



### INCLINING ALUMINIUM LOUVRE BLADES

Up to 135° opening angle



### INSTALLATION

Free-standing, wall and/or ceiling mountable



### COUPLED MODULAR SYSTEM

Up to 10 modules can be connected seamlessly in width and length



### LOUVRE BLADES

Width ranges from 200mm to 220mm, depending on the selected Med Twist model.



### GUTTERS

Each bay requires gutters on all 4 internal perimeters and gutters are not designed to take on water from other structures




### MINIMUM SIZE

Minimum height/depth of frame must be 250mm

## MED TWIST DIFFERENCE

### OPTIONAL LED LIGHTENING



### PROTECTION AGAINST SUNLIGHT AND UV




### AIRFLOW ADJUSTMENT FOR BETTER VENTILATION




### WATERPROOF AND WATERTIGHT




## SUPPORT FRAME OPTIONS & SYSTEM SPECIFICATIONS

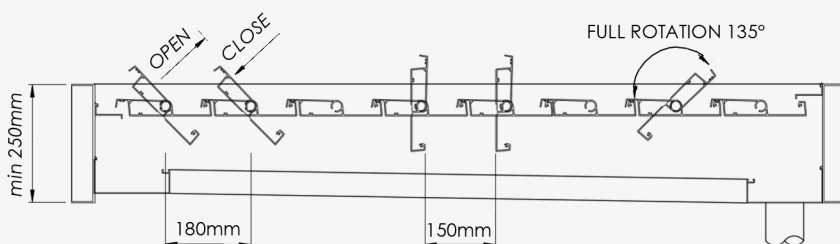


### TYPE 1: ALUMINIUM FRAME




### TYPE 2: TIMBER FRAME




### TYPE 3: REVERSE STEEL PFC



### TYPE 4: CLADDED UNIVERSAL BEAM

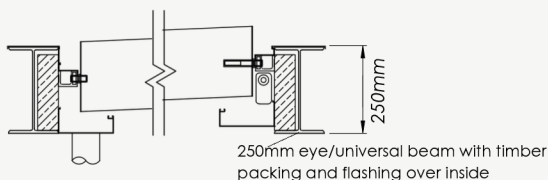

### TYPE 5: MASONRY REVEAL/FRAME

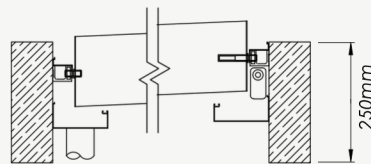

**Outdoor Blinds and Awnings Australia**  
**Phone:** 02 8068 9293  
**Email:** sales@obaau.com.au  
**Website:** obaau.com.au  
**Facebook:** OutdoorBlindsAndAwningsAustralia



The wind resistance class can vary depending on version and dimension.



GET A QUOTE



Terms & Conditions Apply